


# TALON VEHICLE BARRIER

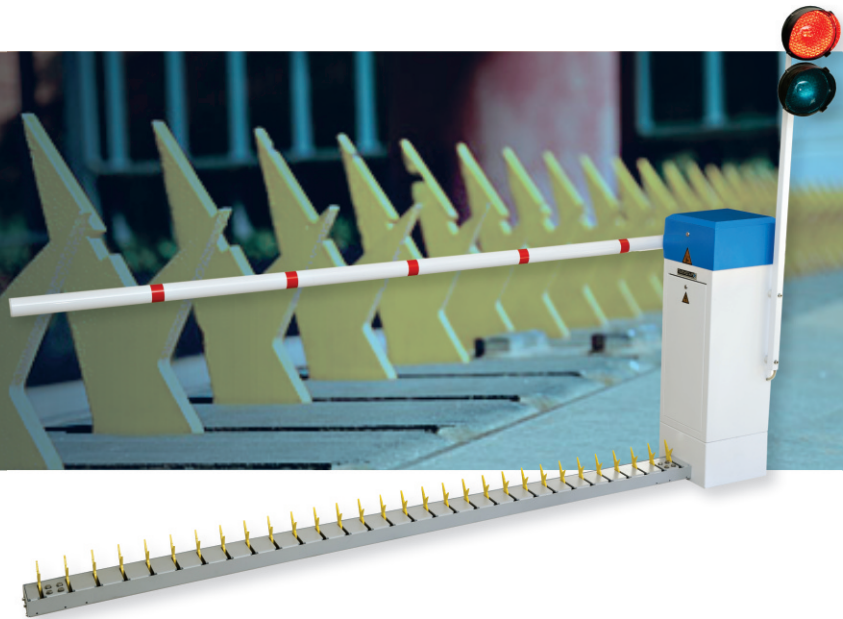

The Talon Barrier offers an ultra-reliable, secure access control solution. Suitable for use in high volume access areas and high levels of security in severe conditions.

## FEATURES

- Various arm lengths available
- Self-lubricating
- Double buffered mechanism lowers mechanical stress
- Spikes lower before gate opens, to prevent vehicles driving over spikes
- double-sided spike, protects from both directions
- Corrosion resistant
- Dust, dirt and moisture resistant
- Left / right handed orientation

## OPTIONAL ACCESSORIES

- Traffic robot
- Card drop box
- Gooseneck with various mountings, such as readers and camera boxes

## SPECIFICATIONS

Power	220 V AC
Frequency	50Hz
Power Consumption	160 W
Cabinet Weight	80 kg
Barrier Arm Weight	0.9 kg per arm
Rack Weight	Recessed - 30 kg p/m / Surface mount - 60 kg p/m
Barrier Speed	3 m - 2.2 seconds to raise / 2.4 seconds to lower 4 m - 3.2 seconds to raise / 3.3 seconds to lower 5 m - 3.3 seconds to raise / 3.4 seconds to lower 6 m - 3.4 seconds to raise / 3.4 seconds to lower
Spike Speed	2.5 seconds

